

Notes:

- All nail fixings pre-drilled minimum 1mm diameter smaller than nail guage
- All products to be pre-coated & cut edges to be sealed as per Branz Bulletin 411
- All materials and fixtures are to comply with E2/AS1 clause 2.2
- Provide PVC tape bond break between H3.2 battens and any flashing
- Rigid & Flexible underlay as per table 23 and clauses 9.1.5 to 9.1.7
- Timber to NZBC B2 durability b2.3.1 (b), Western Red Cedar, Larch

CCA treated BBS 20x45-V
H3.2 timber cavity batten

9x9 compressible foam
strip


Framing

Building wrap as per
E2/AS1 table 23

BBS Rusticated
Weatherboard

75mm annular grooved rose head,
silicone bronze or stainless nail

Internal corner W mould extrusion
50x20x20x50mm min hem edge
folds compatibility to comply with
NZBC E2/AS1

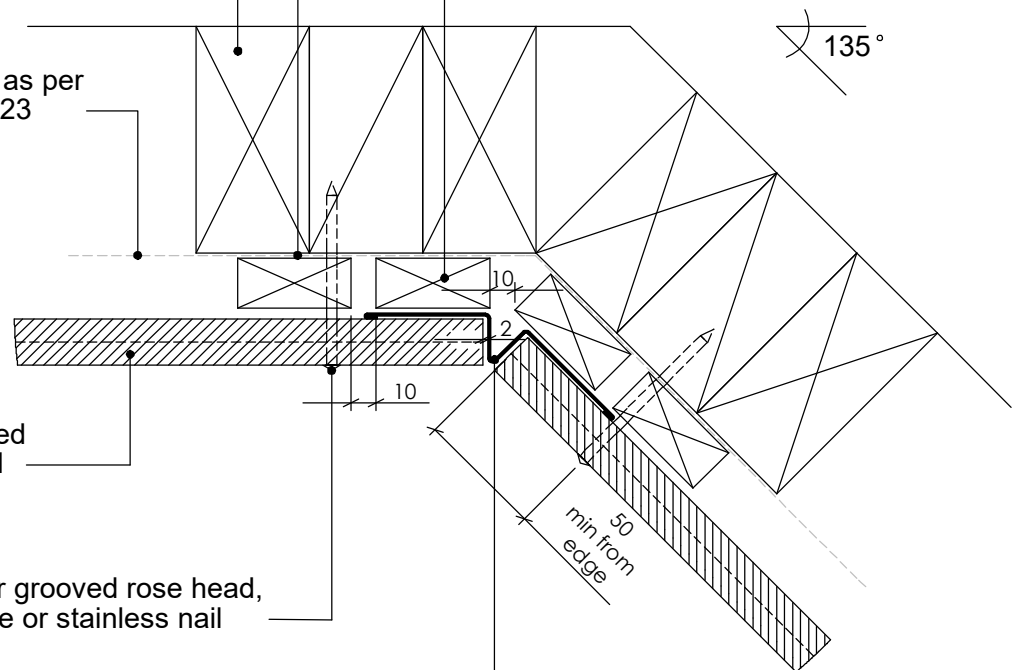

| | | | | | | | | |
|--------|------|-----------|------|-----|---|---|------------------------|--------------|
| TITLE: | | | | | copyright BBS Timbers LTD © | | Internal Corner Detail | |
| | NAME | SIGNATURE | DATE | Rev |  | 27 Kioreroa road PO Box 1407 Whangarei 09 438 9358 | DWG NO. | A4 |
| DRAWN | | | | | | | RC-CW-10 | |
| CHK'D | | | | | | | | |
| APPV'D | | | | | | | | |
| | | | | | | SCALE:1:10 | DNS | SHEET 1 OF 1 |