

Notes:

- All nail fixings pre-drilled minimum 1mm diameter smaller than nail gauge
- All products to be pre-coated & cut edges to be sealed as per Branz Bulletin 411
- All materials and fixtures are to comply with E2/AS1 clause 2.2
- Provide PVC tape bond break between H3.2 battens and any flashing
- Rigid & Flexible underlay as per table 23 and clauses 9.1.5 to 9.1.7
- Timber to NZBC B2 durability B23.1 (b), Western Red Cedar, Larch

Building wrap
as per E2/AS1 table

Framing


85mm annular grooved
rose head silicone bronze
or stainless steel nail

H3.2 45x20 timber
cavity batten

Copper or Stainless corner
soaker to suit specific
BBS Weatherboard

BBS Bevel Back
weatherboard 32mm lap as per
E2/AS1

Minimum 50x50 internal flashing
hem edge folds compatibility to
comply with NZBC E2/AS1

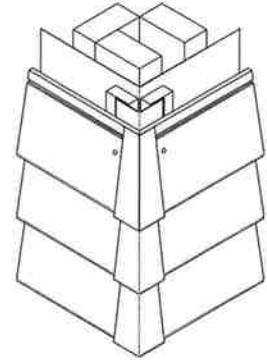

| | | | | | | | |
|--------|------|-----------|------|-----|---|------------------------|--------------|
| TITLE: | | | | | copyright BBS Timbers LTD © | External corner detail | |
| | NAME | SIGNATURE | DATE | Rev |  27 Kioreroa road PO Box 1407 Whangarei 09 438 9358 | DWG NO. | A4 |
| DRAWN | | | | | | B-CW-06 | |
| CHK'D | | | | | | SCALE:1:5 DNS | SHEET 1 OF 1 |
| APP'VD | | | | | | | |