

Notes:

- All nail fixings pre-drilled minimum 1mm diameter smaller than nail gauge
- All products to be pre-coated & cut edges to be sealed as per Branz Bulletin 411
- All materials and fixtures are to comply with E2/AS1 clause 2.2
- Provide PVC tape bond break between H3.2 battens and any flashing
- Vertical Shiplap profiles to be fixed with a minimum 2mm gap at the overlap between boards
- Rigid & Flexible underlay as per Table 23 and Clauses 9.1.5 to 9.1.7 E2/AS1. Timber to NZBC B2 Durability b2.3.1 (b) Western Red Cedar, Larch

A

B

C

D

E

CCA treated BBS 20x45-V
H3.2 timber cavity batten

9x9 compressible foam
strip

Framing


Building wrap as per
E2/AS1 table 23

BBS Vertical Shiplap
Weatherboard

75mm annular grooved rose head,
silicone bronze or stainless nail

Internal corner W mould extrusion
50x20x20x50mm min hem edge
folds compatibility to comply with
NZBC E2/AS1

CCA treated H3.2 45x20
BBS "H" timber cavity batten.
Horizontal @ 480mm centres

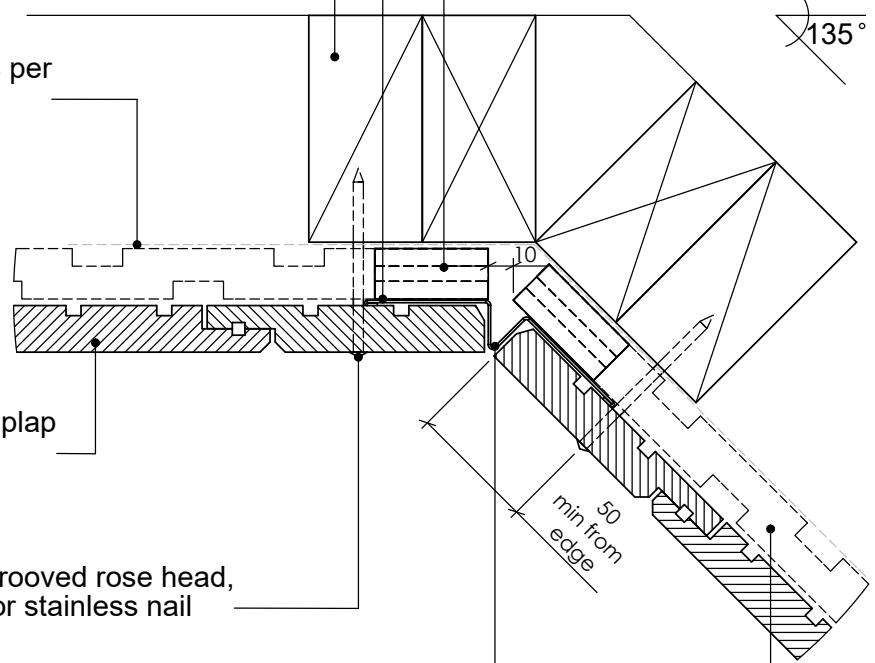

F

TITLE:					copyright BBS Timbers LTD ©		Internal Corner Detail	
	NAME	SIGNATURE	DATE	Rev		27 Kioreroa road PO Box 1407 Whangarei 09 438 9358	DWG NO.	A4
DRAWN							V-CW-10	
CHK'D								
APP'VD								
						SCALE:1:10	DNS	SHEET 1 OF 1