


Notes:

- All nail fixings pre-drilled minimum 1mm diameter smaller than nail gauge
- All products to be pre-coated & cut edges to be sealed as per Branz Bulletin 411
- All materials and fixtures are to comply with E2/AS1 clause 2.2
- Provide PVC tape bond break between H3.2 battens and any flashing
- Specific Rebated Bevel Back, Rusticated & Vertical Shiplap Profiles to be fixed with a minimum 2mm gap at the overlap between boards

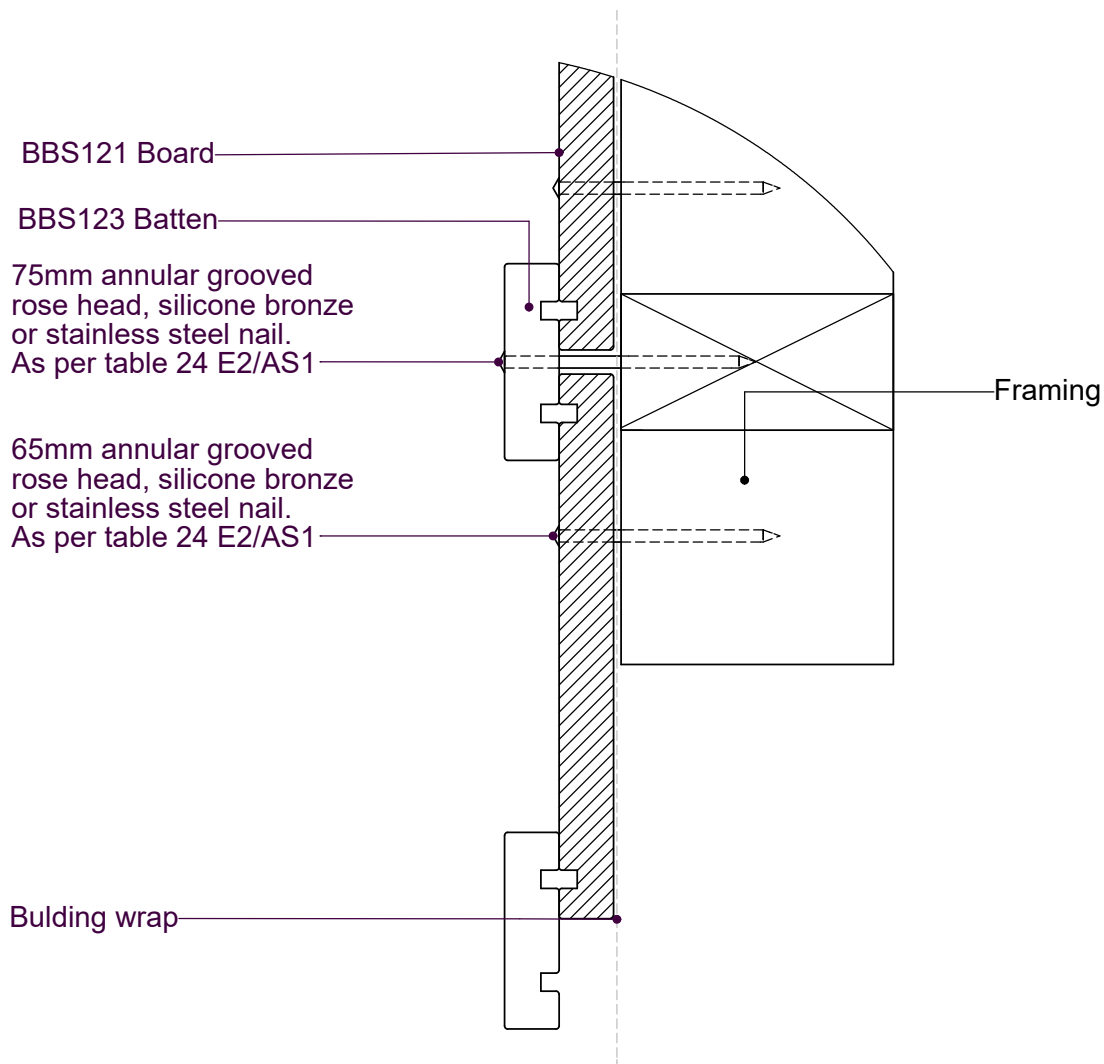

NOTE:

Board & Battens fixed off nogs as per table 24 E2/AS1 at 480mm max centres

					copyright BBS Timbers LTD ©		Batten Joint Detail		
	NAME	SIGNATURE	DATE	Rev		27 Kioreroa road PO Box 1407 Whangarei 09 438 9358	DWG NO.		A4
DRAWN							BB-DF-03		
CHK'D							SCALE:1:5 DNS		
APPV'D							SHEET 1 OF 1		